


V82K-HF ASSEMBLY INSTRUCTIONS


SIDE RAIL ATTACHMENT

1. INSERT 4" THREADED RODS INTO THE TOP & BOTTOM HOLES LOCATED ON THE INSIDE FACE OF THE HEADBOARD.
2. ALIGN THE THREADED RODS & WOOD ALIGNMENT DOWELS WITH THEIR CORRESPONDING HOLES ON THE END OF THE SIDE RAIL ASSY & FACE OF HEADBOARD. PUSH SIDE RAIL ASSY AGAINST HEADBOARD AND TIGHTEN IN PLACE USING NUTS & SPECIALTY WASHER.

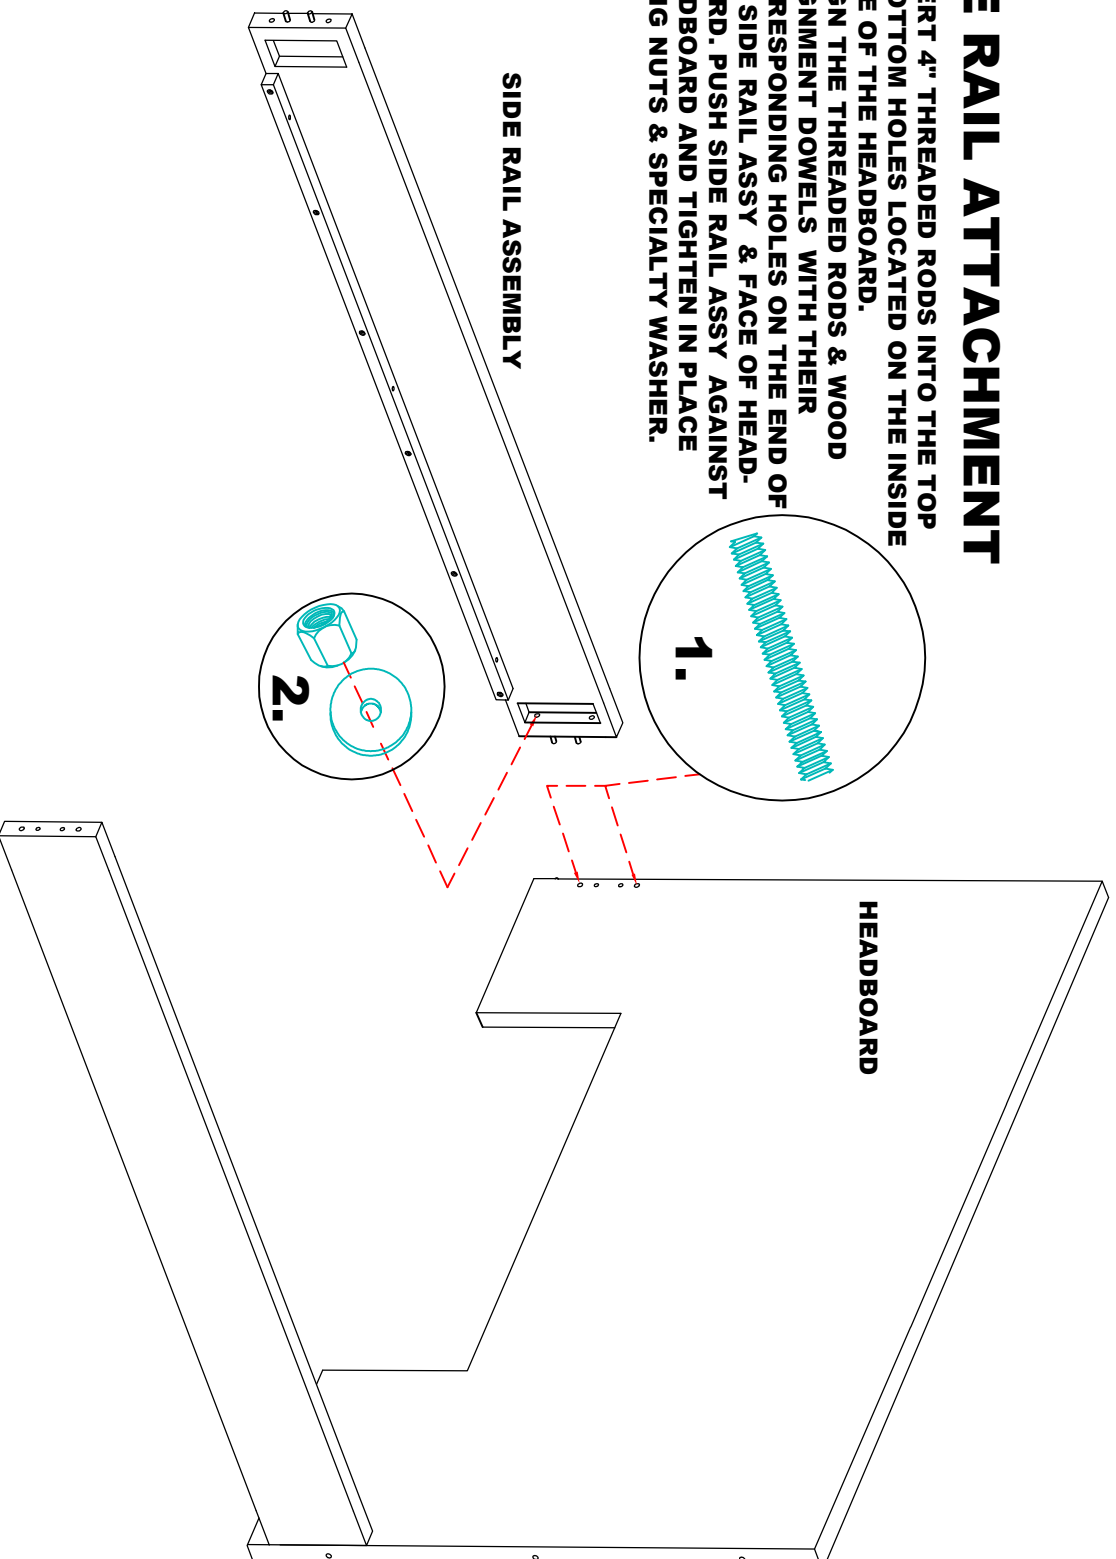

FOOTBOARD ATTACHMENT

1. INSERT 4" THREADED RODS INTO THE TOP & BOTTOM HOLES LOCATED ON THE INSIDE FACE OF THE FOOTBOARD.
2. ALIGN THE THREADED RODS & WOOD ALIGNMENT DOWELS WITH THEIR CORRESPONDING HOLES ON THE END OF THE SIDE RAIL ASSY & FACE OF FOOT BOARD. PUSH FOOT BOARD AGAINST SIDE RAIL ASSY AND TIGHTEN IN PLACE USING NUTS & WASHER.

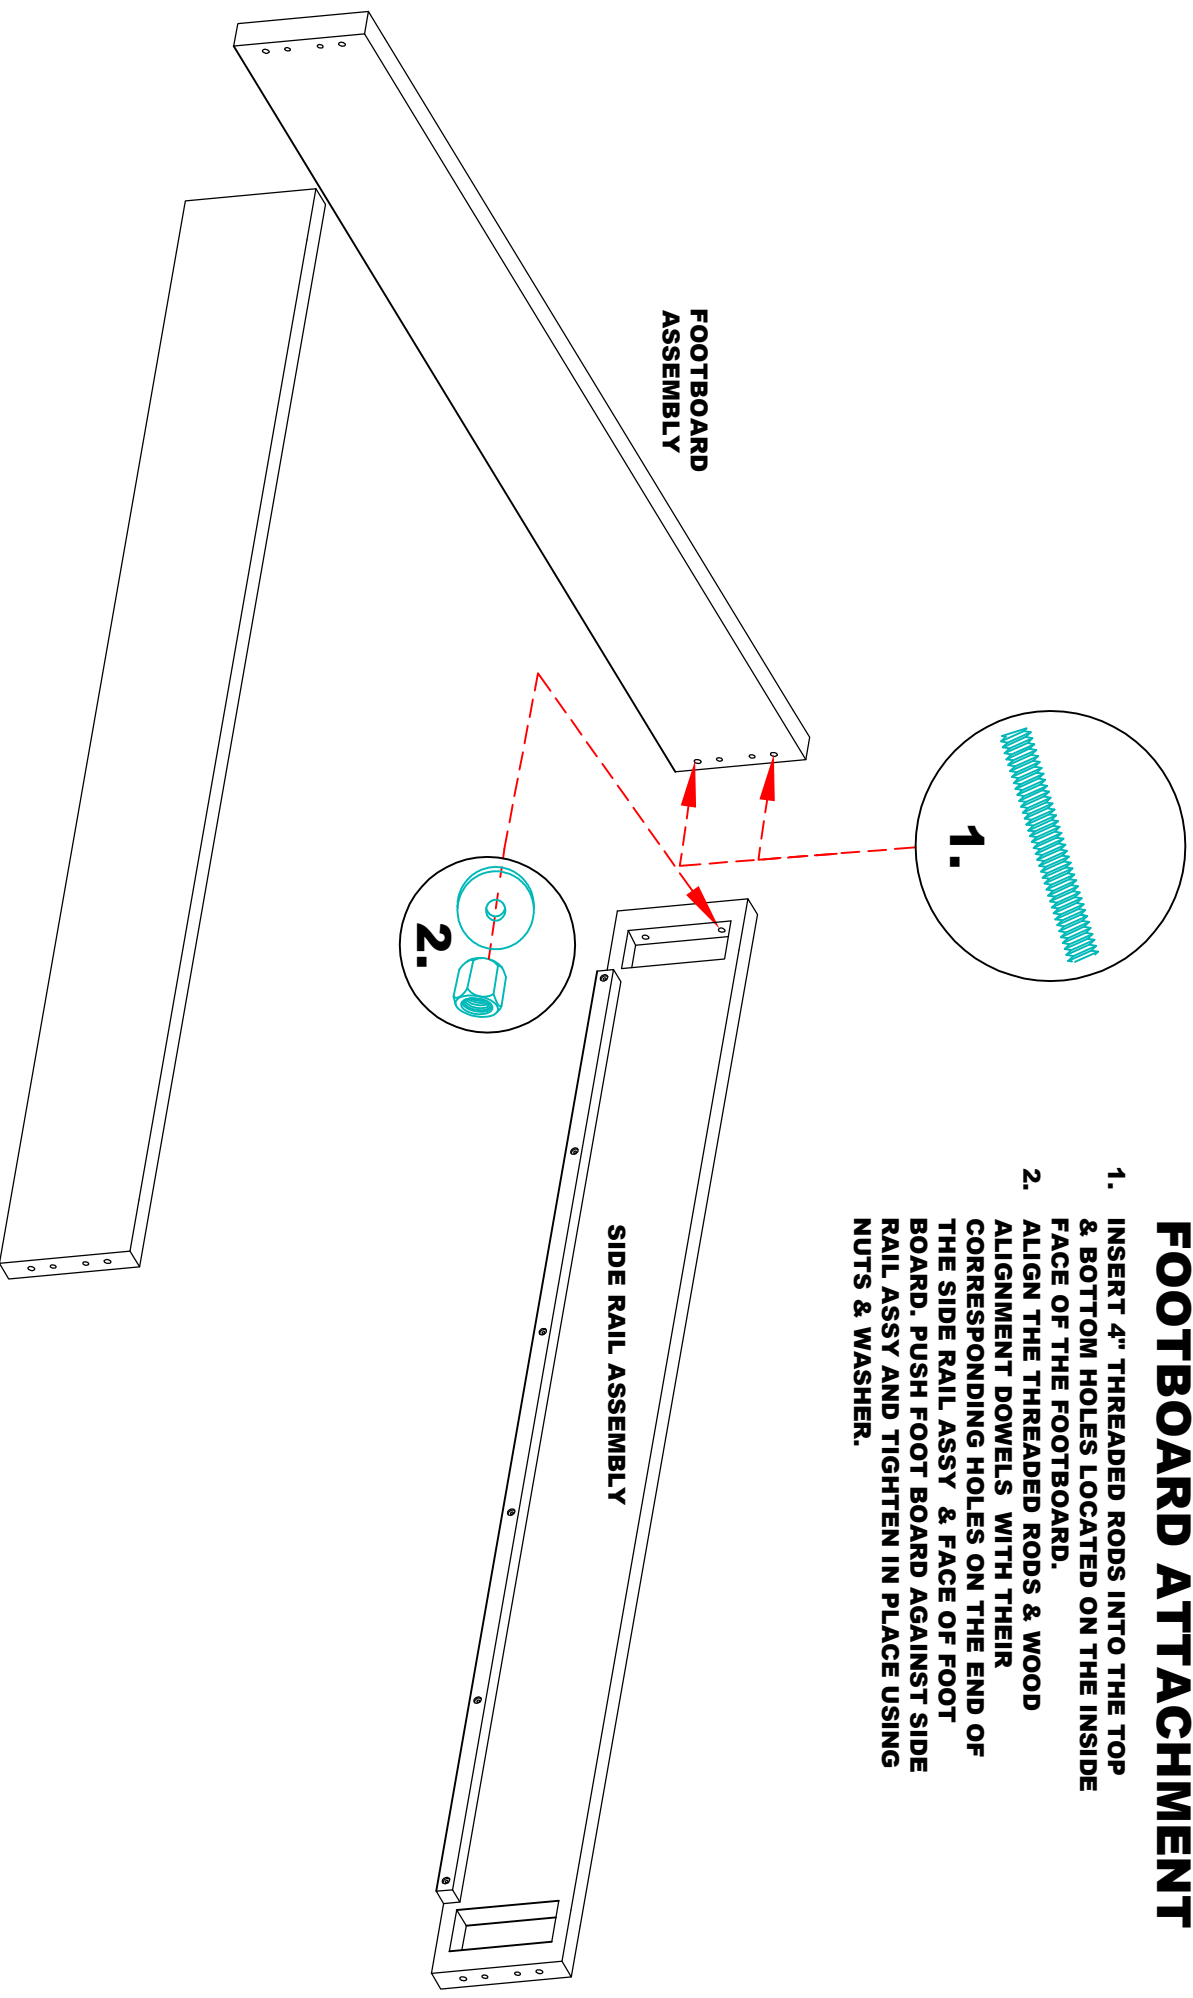

WING ATTACHMENT

1. INSERT 4" THREADED RODS INTO THE THREE HOLES LOCATED ON THE EDGE OF THE HEADBOARD.
2. ALIGN THE THREE HOLES ON THE EDGE OF THE WING ASSY WITH THE THREADED RODS ON THE HEADBOARD. PUSH WING AGAINST HEADBOARD AND TIGHTEN IN PLACE USING NUTS & SPECIALTY WASHER

